

U.S. Serial No. 10/666,356
Reply to Office Action of: April 17, 2006
Family Number: P2002J093 US2

Page 3

AMENDMENTS TO THE SPECIFICATION

- 3 -

and antiwear additives may compete for the surface of the metal parts which are subject to lubrication. This competition can produce a lubricant that is less effective than is suggested by the individual properties of the additive components.

[0008] Accordingly, the components of a gas engine lubricant need to be selected to meet the specified ash level and to provide, among other functions, a high level of oxidation and nitration resistance. Whether selected components and their amounts can be balanced to meet desired specification is not a priori predictable.

[0009] Many stationary four-cycle gas engines require exhaust catalysts to meet local exhaust emissions limits. Phosphorus emissions ~~poison~~poisons the exhaust catalyst material and so manufacturers have placed limits on the fresh oil's phosphorus content. Currently, the strictest limit is 0.03 wt% phosphorus and it is possible that lower phosphorus levels may be legislated in the future. The source of phosphorus in gas engine oils is the ZDDP antioxidant/antiwear additive used in the oil. Reducing ZDDP treats in the oil to lower the phosphorus content is expected to shorten oil life. Therefore, new gas engine oil compositions with very low phosphorus levels and good antioxidant and antiwear properties are needed.

SUMMARY OF INVENTION

[0010] The present invention relates to a lubricating oil composition that at very low phosphorus levels has extended life, as evidenced by reductions in viscosity increase, oxidation and nitration when used at elevated temperatures in gas engines.

U.S. Serial No. 10/666,356
Reply to Office Action of: April 17, 2006
Family Number: P2002J093 US2

Page 4

- 4 -

[0011] The composition comprises:

- (a) a major amount of a base oil of lubricating viscosity;
- (b) a combination of neutral and overbased metallic detergents in an amount sufficient to provide a sulfated ash in the range of about 0.2 wt% to about 2.0 wt% based on the total weight of the composition;
- (c) from about ~~0.000~~0.06 vol% to 0.15 vol% of a zinc dialkyldithiophosphate and about 0.1 vol% to 2.0 vol% of a zinc dialkyldithiocarbamate based on the total volume of the composition; and
- (d) based on the total volume of the composition, from about 0.5 vol% to about 2.0 vol% of an ashless dihydrocarbylthiocarbamoyl antioxidant, or from about ~~0.0~~ 0.5 vol% to about 1.9 vol% of phenolic antioxidants, or from about 0.5 vol% to about 3.0 vol% of mixtures thereof.

[0012] Preferably the composition of the invention will include one or more gas engine oil additives including ashless dispersants, ashless antiwear additives, metal passivators, pour point depressants, ~~VI~~ Viscosity Index (VI) improvers, and antifoamants.

[0013] The composition of the invention may be further characterized as having a phosphorus content of up to 0.015 wt%, preferably between about 0.005 to about 0.008 wt%.

[0014] Other embodiments of the invention will become apparent from the detailed description which follows.

U.S. Serial No. 10/666,356
Reply to Office Action of: April 17, 2006
Family Number: P2002J093 US2

Page 5

- 5 -

DETAILED DESCRIPTION OF INVENTION

[0015] The composition of the invention includes a major amount of a base oil of lubricating viscosity. Suitable base oils include any natural or synthetic base oil or blends thereof in API categories I, II and III, having a kinematic viscosity at 100°C of about 5 to about 16 cSt and preferably about 9 to 13 cSt.

[0016] The lubricating oil composition of the invention contains a combination of neutral and overbased metallic detergents such as alkali metal and alkaline earth sulfonates, phenates and alkylsalicylates. The preferred metal of the detergents is calcium or barium. Examples of suitable neutral metallic detergents are calcium sulfonates and calcium alkylsalicylates having a Total Base Number (TBN) TBN of from 10 to 100. Examples of overbased metallic detergents are calcium phenates, sulphonates and alkylsalicylates having a TBN of 150 to 400. The amount of the neutral and overbased metallic detergent is chosen having regard to the desired TBN of the final product and especially having regard to the desired sulfated ash of the final product. Preferably the mixture of neutral and overbased metallic detergents is sufficient to provide the composition with a sulfated ash in the range of about 0.2 wt % to about 2.0 wt %.

[0017] The composition also includes a combination of zinc dialkyldithiophosphate and zinc dialkyldithiocarbamate as antiwear agents and oxidation inhibitors. The alkyl group in the zinc compounds typically will be in the range of 3 to 12 carbon atoms. The amount of zinc dialkyldithiophosphate will be in the range of about 0.0 ~~0.06~~ vol% to 0.15 vol% and the amount of zinc dialkyldithiocarbamate will be in the range of about 0.1 vol% to 2.0 vol%, based on the total volume of the composition.

U.S. Serial No. 10/666,356
Reply to Office Action of: April 17, 2006
Family Number: P2002J093 US2

Page 6

- 6 -

[0018] The composition also includes from about 0.5 vol% to about 2.0 vol% an ashless dihydrocarbylthiocarbamoyl antioxidant, or ~~0-0~~ 0.5 vol% to about 1.9 vol% of phenol type antioxidant, or from about 0.5 vol% to about 3.0 vol% of mixtures thereof.


[0019] The term "phenol type" used herein includes compounds having one or more than one hydroxy group bound to an aromatic ring which may itself be mononuclear, eg, benzyl, or polynuclear, eg naphthyl and spiro aromatic compounds. Thus, "phenol type" includes phenol per se, catechol, resorcinol, hydroquinone, naphthol, etc., as well as alkyl or alkenyl and sulphurised alkyl or alkenyl derivatives thereof, and bisphenol type compounds including such bi-phenol compounds linked by alkylene bridges or sulphur or oxygen bridges. Alkyl phenols include mono- and poly-alkyl or alkenyl phenols, the alkyl or alkenyl group containing from about 3 to 100 carbons, preferably 4 to 50 carbons and sulphurised derivatives thereof, the number of alkyl or alkenyl groups present in the aromatic ring ranging from 1 up to the available unsatisfied valences of the aromatic ring remaining after counting the number of hydroxyl groups bound to the aromatic ring.

[0020] Most preferably the phenol is a hindered phenol such as di-isopropyl phenol, di-t-butyl phenol, di-t-butyl alkylated phenol where the alkyl substituent is hydrocarbyl and contains between 1 and 20 carbon atoms, such as 2,6, di-t-butyl-4-methyl phenol, 2,6 di-t-butyl-4-ethyl phenol, etc., or 2,6 di-t-butyl 4-alkoxy phenol.

[0021] Suitable dihydrocarbylthiocarbamoyl compounds are represented by the formula

U.S. Serial No. 10/666,356
 Reply to Office Action of: April 17, 2006
 Family Number: P2002J093 US2

Page 7

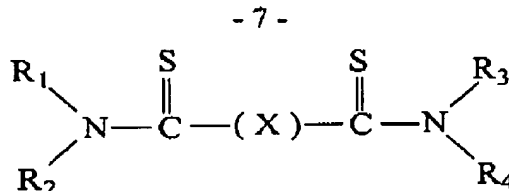

where R_1 , R_2 , R_3 and R_4 are the same or different and each represents an alkyl group of 3 to 30 carbon atoms, X represents S, S-S, $\text{S}-(\text{CH}_2)_y\text{S}$, $\text{S}-\text{CH}_2\text{CH}_2(\text{CH}_3)-\text{S}$ and y is an integer of 1 to 3.

[0022] A fully formulated oil may contain one or more gas engine oil additives including ashless dispersants, ashless antiwear additives, metal passivators, pour point depressants, ~~VI~~ Viscosity Index (VI) improvers and antifoamants.

[0023] The compositions of the invention have a phosphorous content of up to 0.015 wt%, preferably between about 0.005 wt% to about 0.008 wt%.

EXPERIMENTAL

Lab Nitration Screener Test Results

[0024] A lab nitration screener test was used to assess the oil life performance of various oil compositions. The test results identify a number of parameters including oil viscosity increase, oxidation, and nitration. All measurements are reported on a relative basis (unless otherwise indicated) so that results greater than unity represent greater levels of degradation. Numerically lower relative results represent a measure of longer oil life. In each test, a Reference Oil is tested and results are reported as a ratio of the result for the test oil divided by the result for the Reference Oil. Thus, if a tested oil has an oxidation result of 1.0, then it has oxidation performance equal to that of the Reference Oil. If the

U.S. Serial No. 10/666,356
Reply to Office Action of: April 17, 2006
Family Number: P2002J093 US2

Page 8

- 8 -

tested oil has an oxidation result less than 1.0, then the tested oil demonstrates oxidation performance superior to that of the Reference Oil.

EXAMPLES

[0025] Table 1 provides compositional details of a series of experimental formulations which demonstrate the invention. The Table also sets forth test results used to evaluate the performance of the formulations of the invention and a number of comparative formulations, under nitro-oxidising conditions. The Laboratory Nitration Screener Test results are measured relative to Reference Oil 1.

[0026] The base oil of the compositions of Table 1 was a 600N American Petroleum Institute (API) API Group II basestock. Comparative Oils 1 and 2 use a commercially available gas engine oil additive package, which is one of the most widely sold gas engine oil packages and therefore represents a "benchmark standard" against which other gas engine oil formulations may be measured. Comparative Oil 2 includes a sulfur containing phenolic antioxidant as described in U.S. Patent 5,569,405. Reference Oil 1 represents the improved oil of U.S. Patent 6,140,282. The ZDDP treat in the Reference Oil and the Comparative Oils was about 0.3 vol%, which provides about 300 ppm phosphorus. The ZDDP treat in the invention examples was 0.06 vol%, or about 60 ppm phosphorus.

[0027] Reference Oil 1 and Example Oils 1-4 each contained the same mixture of neutral and overbased metallic detergents, ashless dispersant and pour point depressant. All of the oils in Table 1 were formulated to be nominally 0.45 mass% sulphated ash and had substantially the same TBN.

- 9 -

TABLE I

Component (vol%)	Formulation Description						
	Comparative Oil 1	Reference Oil 1	Invention Example 1	Invention Example 2	Invention Example 3	Invention Example 4	Comparative Oil 2 (USP 5,569,405)
	Basestock Description						
	Group II basestocks	Group II basestocks	Group II basestocks	Group II basestocks	Group II basestocks	Group II basestocks	Group II basestocks
Group II basestock	87.90	90.00	89.73	89.73	89.73	89.73	87.90
Natural Gas Engine Oil (NGEO) NGEQ-commercial additive package	9.60	---	---	---	---	---	9.60
Balance of additive system	1.50	8.71	8.71	8.71	8.71	8.71	1.50
Zinc dialkylthiophosphate	---	0.29	0.06	0.06	0.06	0.06	---
Phenolic antioxidant 1	1.00	1.00	---	---	---	---	---
Phenolic antioxidant 2	---	---	---	1.00	---	0.50	---
Sulfur-containing phenolic antioxidant	---	---	---	---	1.00	---	1.00
Zinc dialkylthiocarbamate	---	---	0.50	0.50	0.50	0.50	---
Ashless dihydrocarbylthiocarbonyl	---	---	1.00	---	---	0.50	---
Kinematic Viscosity, cSt measured KV @ 100°C	13.25	13.14	13.14	13.11	13.11	13.32	13.31
Nitration Screener Test							
oxidation (relative to Reference Oil 1)	1.76	1.00	0.76	0.71	0.99	0.59	1.64
nitration (relative to Reference Oil 1)	1.55	1.00	0.64	0.83	0.82	0.37	1.44
viscosity increase (relative to Reference Oil 1)	1.70	1.00	-0.13	0.76	0.26	0.19	1.29